



810016

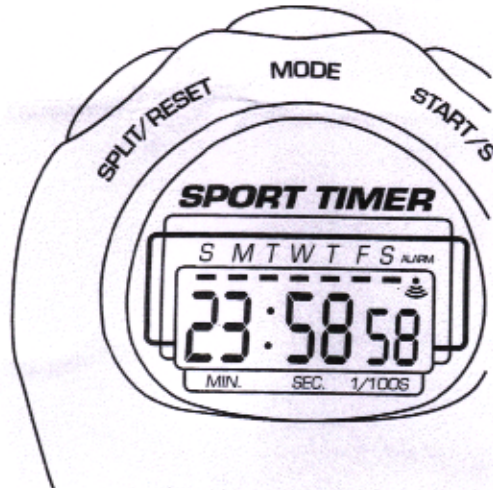

#### STOPWATCH OPERATION

Press A until Stopwatch display  
If necessary, Press B-Stop & C-Reset to 0

Event	Split	1-2Finish
B-Start	B-Start	B-Start
B-Stop	C-Split	C-stop#1
(Repeat B,B	C-Release	B-Stop#2
time-in/	(RepeatC,C	(See#1 time)
time-out)	each Split)	C-Release
C-Reset	B-Stop	(See#2time)
	C-Reset	C-Reset

#### TIME, CALENDAR & ALARM DISPLAY

Press A until at time display,  
Hold B-display Month, date & day  
Hold C-display Alarm  
Hold B & C Alarm On/Off

#### TO SET TIME & CALENDAR

Press A 3 time to enter Set Mode  
Press C to select Seconds, Minutes, Hour  
(A/P=12HOUR, H=24 Hour), Date, Month, Day.  
Press B to change any of the above.  
(Second only refers to 00.)  
(Hold B to change digits rapidly.)  
Press A to return to Time display

#### TO SET ALARM

Press A 2 times to enter set mode.  
Press C to select Minutes & Hours.  
Press B to change Minutes & Hours.  
Press A to return to Time display.

For best results, use Silver Oxide Battery.